arXiv:1204.4075v2 [math.AP] 20 Dec 2012

Webster's equation
with curvature and dissipation

Teemu Lukkari and Jarmo Malinen

December 21, 2012

Abstract

Wave propagation in curved tubular domains is considered. A general version of Webster's equation is derived from the scattering passive wave equation. More precisely, it is shown that planar averages of a sufficiently smooth solution of the wave equation satisfy the corresponding Webster's equation when the latter includes additional control signals determined by the solution.

Keywords. Wave propagation, tubular domain, Webster's model, vocal tract.
AMS classification. Primary 35L05, secondary 35L20, 93C20, 47N70.

1 Introduction

We study wave propagation in narrow and long, tubular 3D domains Ω of finite length, with varying cross-section area. In this case, there is a classical approximation in one spatial variable, *Webster's equation*, to the full 3D wave equation. Variable cross sections of Ω are represented there by the *area function* $A(\cdot)$ that appears as a weight in the elliptic part of Webster's equation. The purpose of this and the companion papers [3, 15] is to justify this approximation in great generality and in a mathematically rigorous way, and to give an error estimate by an *a posteriori* method.

Early work concerning Webster's equation can be found in [7, 25, 26, 28]. Webster's original work [28] was published in 1919, but the model itself has a longer history spanning over 200 years and starting from the works of D. Bernoulli, Euler, and Lagrange. A selection of more modern approaches is provided by [12, 13, 19, 21, 23], and [22], which is particularly interesting in the context of this work. Shared features of the modern treatments are the time-harmonic Ansatz and asymptotic expansions for the velocity potential function ϕ satisfying the wave equation (either with or without underlying convection). The time-harmonic Ansatz leads to the corresponding time-invariant form of the model, analogous to the Helmholtz equation. The resonance structure (i.e., the formants) of the model is obtained from the resulting eigenvalue problem; see, e.g., asymptotic spectra of Neumann–Laplacian on shrinking tubular domains in [11, 24]. Our complementary approach is to look for equations that are satisfied by planar averages $\bar{\phi}$ of ϕ which is likely how Webster's equation was first discovered. This results in a precise equation for the averages $\bar{\phi}$. If three load terms (3.11)–(3.13) are neglected from this equation, Webster's equation is obtained in a generalised form.

Our interest in Webster's equation stems from the fact that it provides a simple and tractable models of the acoustics of the human vocal tract as it appears during vowel utterance. This equation (as well as the wave equation) can be used as a part of a computational physics model; see, e.g., [2, 5, 6, 8, 10] and the references therein. The other parts are a mechanical model for the glottis and an exterior space model outside the mouth; see [1, 2]. Following these ideas and motivations, a boundary control action is used to represent the acoustic field produced by the glottis source. Further applications of Webster's equation include modelling of water waves in tapered channels, acoustic design of exhaust pipes and jet engines for controlling noise, vibration, and performance as well as construction of instruments such as loudspeakers and horns.

We represent a tubular domain $\Omega \subset \mathbb{R}^3$ as follows. The center line of the tube can be thought of as a smooth curve γ (of unit length) parametrised by arc length s. We assume that the cross section perpendicular to the tangent of γ at the point $\gamma(s)$ is a circular disk $\Gamma(s)$ with the radius $R(s)$. The boundary of Ω then consists of the *ends* of the tube, $\Gamma(0)$ and $\Gamma(1)$, and the *wall* Γ of the tube.

Lossless acoustic wave propagation in Ω can be modelled by the wave equation

$$\begin{cases} \frac{\partial^2 \phi}{\partial t^2} = c^2 \Delta \phi \quad \text{in} \quad \Omega \times \overline{\mathbb{R}}_+, \\ \frac{\partial \phi}{\partial \nu} = v \text{ and } \rho \frac{\partial \phi}{\partial t} = p \quad \text{on} \quad \Gamma(0) \times \overline{\mathbb{R}}_+, \\ \phi = 0 \quad \text{on} \quad \Gamma(1) \quad \text{and} \quad \frac{\partial \phi}{\partial \nu} = 0 \quad \text{on} \quad \Gamma \end{cases} \tag{1.1}$$

where ν denotes the unit exterior normal vector, ϕ is the (perturbation) velocity potential, and the control/observation functions $p = p(\mathbf{r}, t)$ and $v = v(\mathbf{r}, t)$ are the pressure and (perturbation) velocity at the controlled end $\Gamma(0)$, respectively. The sound speed in and the density of the medium are denoted by c and ρ, respectively. The Dirichlet condition on $\Gamma(1)$ represents an open end, and the Neumann condition on Γ represents a completely reflecting surface. Other boundary conditions (such as the boundary dissipation condition (3.2)) can be used as well.

The lossless Webster's equation

$$\begin{cases} \frac{\partial^2 \psi}{\partial t^2} = \frac{c^2}{A(s)} \frac{\partial}{\partial s}\left(A(s) \frac{\partial \psi}{\partial s}\right) \quad \text{for} \quad (s,t) \in [0,1] \times \overline{\mathbb{R}}_+, \\ v(t) = \frac{\partial \psi}{\partial s}(0,t), \quad p(t) = \rho \frac{\partial \psi}{\partial t}(0,t) \text{ and } \psi(1,t) = 0 \text{ for } t \in \overline{\mathbb{R}}_+. \end{cases} \tag{1.2}$$

is a computationally and mathematically simpler wave propagation model than (1.1). Here $A(s)$ is the area of the cross section $\Gamma(s)$, and the solution ψ is *Webster's velocity potential.* Webster's equation (1.2) serves as a good approximation of (1.1) for wave lengths long compared to $R(s)$. More precisely, the solution ψ approximates the averages

$$\bar{\phi}(s,t) := \frac{1}{A(s)} \int_{\Gamma(s)} \phi \, dA \quad \text{for} \quad s \in (0,1) \quad \text{and} \quad t \geq 0 \tag{1.3}$$

of the velocity potential ϕ given by (1.1).

Let us discuss the control/observation boundary conditions on $\Gamma(0)$ in (1.2). When either one of the models (1.1) and (1.2) is used, the wave propagation is treated in *impedance form* as in [4, Section 5]. Alternatively, the control and observation boundary condition may be defined so that the physical dimension (which is power per unit area) of both input and output coincide. We take the latter approach in this paper as well as in [3, 15]. It is called the *scattering form*, and it is obtained by replacing the second line in (1.1) by the equations

$$\begin{aligned} c\frac{\partial \phi}{\partial \nu}(\mathbf{r},t) + \frac{\partial \phi}{\partial t}(\mathbf{r},t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, u(\mathbf{r},t) \quad \text{and} \\ c\frac{\partial \phi}{\partial \nu}(\mathbf{r},t) - \frac{\partial \phi}{\partial t}(\mathbf{r},t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, y(\mathbf{r},t) \end{aligned} \tag{1.4}$$

for $t \in \mathbb{R}^+$ and $\mathbf{r} \in \Gamma(0)$ where $u(\mathbf{r},t)$ is the input, and $y(\mathbf{r},t)$ is the output. The interplay between impedance and scattering forms is discussed in a general setting in, e.g., [16, 17, 18]. The corresponding inputs and outputs for the Webster's equation are uniquely obtained from (1.4) by averaging in the same way as in (1.3). Indeed, we get (under a minor technical assumption explained at the end of Section 4)

$$\begin{aligned} -c\frac{\partial \psi}{\partial s}(0,t) + \frac{\partial \psi}{\partial t}(0,t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, \bar{u}(t) \quad \text{and} \\ -c\frac{\partial \psi}{\partial s}(0,t) - \frac{\partial \psi}{\partial t}(0,t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, \bar{y}(t) \end{aligned} \tag{1.5}$$

for $t \in \mathbb{R}^+$ where $\bar{u}(t) := \frac{1}{A(0)} \int_{\Gamma(0)} u(\mathbf{r}, t) dA$ and $\bar{y}(t) := \frac{1}{A(0)} \int_{\Gamma(0)} y(\mathbf{r}, t) dA$ are the averages of the input u and output y, respectively.

The wave equation with the boundary conditions $\phi = 0$ on $\Gamma(1)$, equations (1.4) and (3.2) define an internally well-posed, dissipative dynamical system as shown in [3, Theorem 4.1, items (i) and (iii), and Corollary 4.2]. The analogous statement holds for Webster's equation with the boundary conditions $\psi(1, \cdot) = 0$ and (1.5); see [3, Theorem 5.1]. Such systems have unique solutions ϕ and ψ for twice differentiable input signals and compatible initial conditions at $t = 0$, as a consequence of [3, Proposition 2.2]. Further, by [3, Theorem 4.1(ii) and Corollary 4.2], ϕ has the regularity properties

$$\begin{aligned} \phi \in C^1(\mathbb{R}^+; H^1(\Omega)) \cap C^2(\mathbb{R}^+; L^2(\Omega)), \quad & \frac{\partial \phi}{\partial \nu} \in C(\mathbb{R}^+; L^2(\partial\Omega)) \\ \nabla \phi \in C^1(\mathbb{R}^+; L^2(\Omega; \mathbb{R}^3)), \quad \text{and} \quad & \Delta \phi \in C(\mathbb{R}^+; L^2(\Omega)) \end{aligned} \tag{1.6}$$

which will be used throughout this article. Let us note that the method of asymptotic expansions also requires a nontrivial implicit regularity assumption so that the expansion exists; see [22, p. 1985].

Referring to Fig. 1, the main results of this and the companion papers [3, 15] can be summarized as follows:

(i) By Theorem 3.2 and the solvability of the scattering wave equation model on Ω, all the signals in Fig. 1 are well-defined functions, and the average $\bar{\phi}$ satisfies nonhomogeneous Webster's equation with the load term $F + G + H$ as given by (3.11) – (3.13).

(ii) The solution of the homogenous Webster's equation ψ approximates the averages $\bar{\phi}$ in (1.3), and the tracking error can be controlled by F, G, and H with the aid of a slight refinement of the argument in [3, Section 5] to include direct control to state, as shown in [15].

(iii) The load terms F, G, and H (and hence, the tracking error) can be *a posteriori* estimated by ϕ using the technical results from Section 4, as shown in [15].

All these results are shown for a more general model than the scattering version of (1.1) and (1.2). The curvature of Ω is taken into account in Webster's equation by introducing a correction factor to the speed of sound; see (4.12) and also [22, Section 6]. Further, boundary dissipation is allowed through the lateral wall Γ by the boundary condition (3.2). This leads to a dissipation term in Webster's equation (3.4). The full results require that the torsion of the center line γ of Ω vanishes, and that $A'(0) = \kappa(0) = 0$ where κ is the curvature of γ.

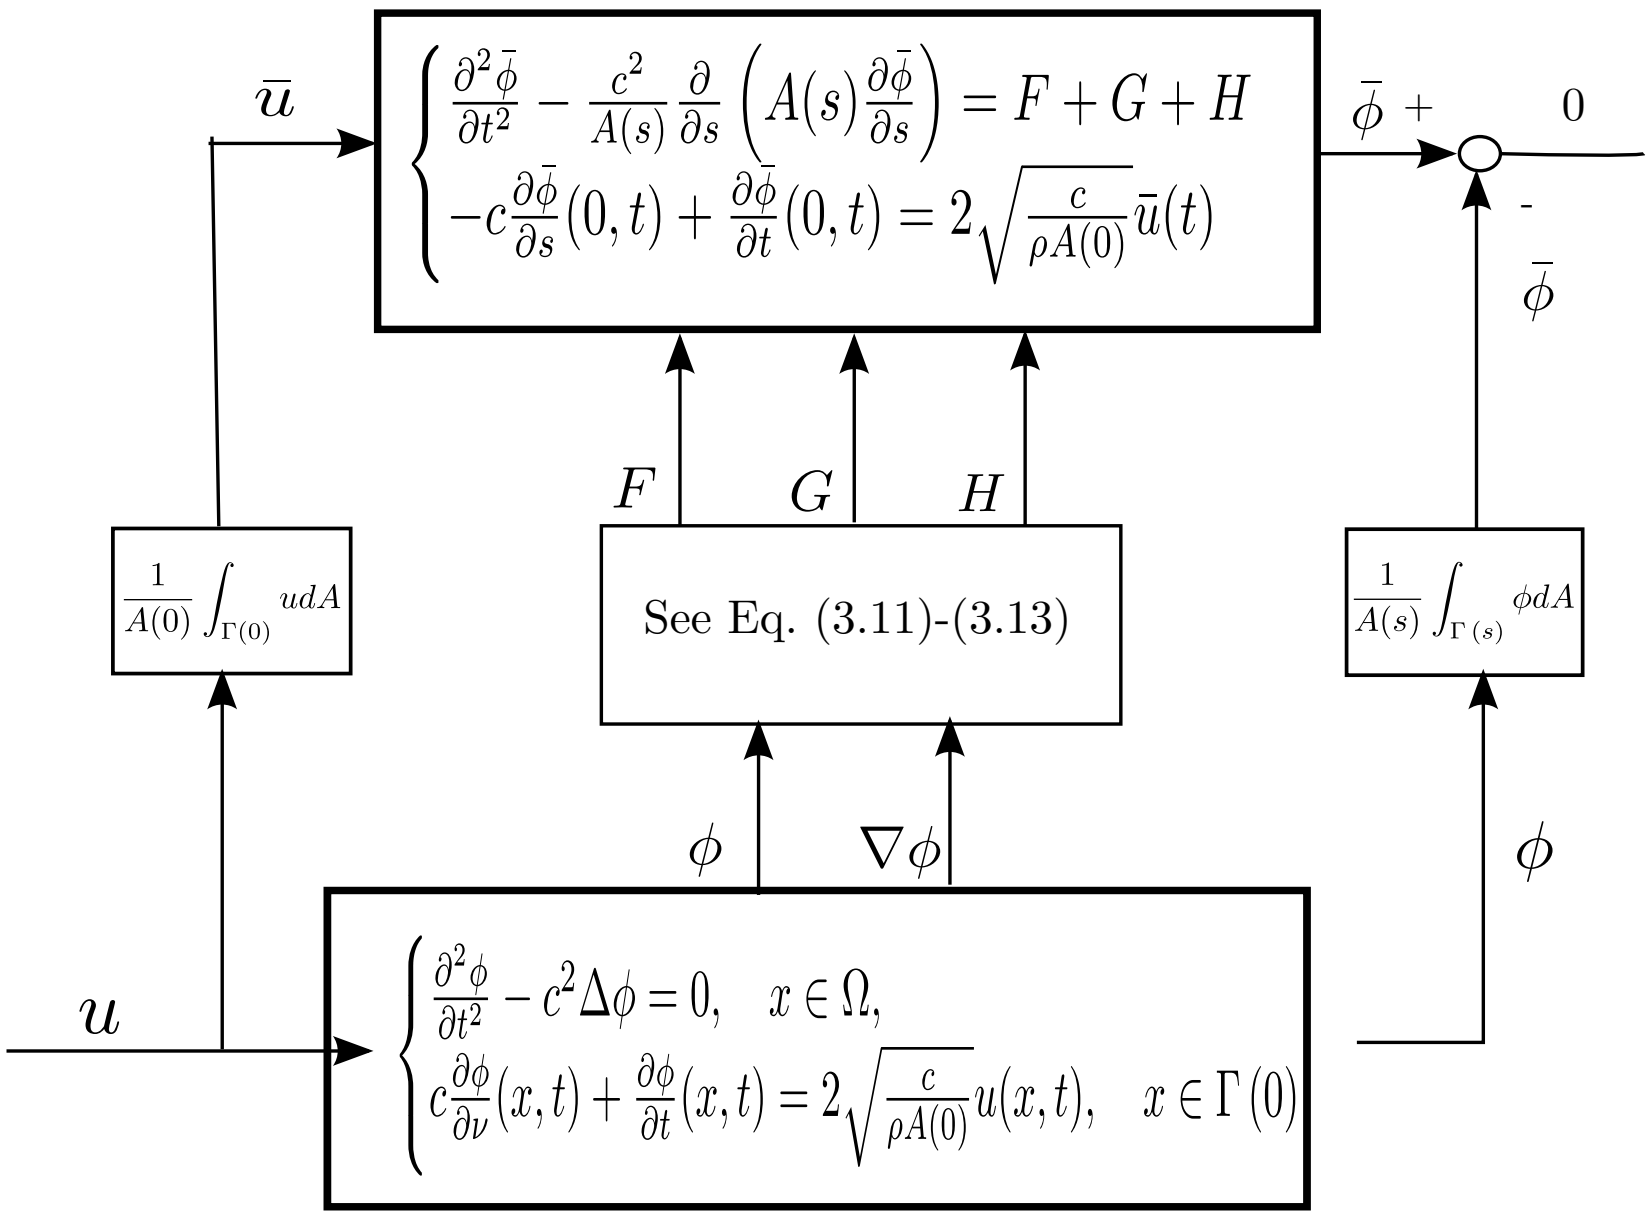
$\bar{u}$
$\begin{cases} \frac{\partial^2 \bar{\phi}}{\partial t^2} - \frac{c^2}{A(s)}\frac{\partial}{\partial s}\left(A(s)\frac{\partial \bar{\phi}}{\partial s}\right) = F + G + H \\ -c\frac{\partial \bar{\phi}}{\partial s}(0,t) + \frac{\partial \bar{\phi}}{\partial t}(0,t) = 2\sqrt{\frac{c}{\rho A(0)}}\bar{u}(t) \end{cases}$
$\bar{\phi}$ +
0
-
$\bar{\phi}$
F
G
H
$\frac{1}{A(0)}\int_{\Gamma(0)} u dA$
See Eq. (3.11)-(3.13)
$\frac{1}{A(s)}\int_{\Gamma(s)} \phi dA$
ϕ
$\nabla\phi$
ϕ
u
$\begin{cases} \frac{\partial^2 \phi}{\partial t^2} - c^2\Delta\phi = 0, \quad x \in \Omega, \\ c\frac{\partial \phi}{\partial \nu}(x,t) + \frac{\partial \phi}{\partial t}(x,t) = 2\sqrt{\frac{c}{\rho A(0)}}u(x,t), \quad x \in \Gamma(0) \end{cases}$

Figure 1: Feedforward coupling describing the main results of this paper. The equations in the blocks are as they appear in the lossless case and without curvature.

The paper is organized as follows: In Section 2, we discuss the details of the coordinate system for the problem described above. The main result, Theorem 3.2 is given without proof in Section 3. In Section 4, we present the formal derivation of Webster's equation with curvature and dissipation. Also the scattering boundary conditions are derived from those of the wave equation. Section 5 contains the rigorous proof of Theorem 3.2.

2 Global coordinates in a curved tube

In this section, we give the necessary facts about the coordinate system we use to represent tubular domains as shown in Fig. 2; see also [22, Section 2.3]. Detailed arguments are given in appendices at the end of the paper.

Let $\gamma : [0,1] \to \mathbb{R}^3$ be a smooth curve parameterized by arc length s. Define for $s \in [0,1]$ the unit vectors

$$\mathbf{t}(s) := \gamma'(s), \quad \mathbf{n}(s) := \frac{\mathbf{t}'(s)}{\kappa(s)}, \quad \text{and} \quad \mathbf{b}(s) := \mathbf{t}(s) \times \mathbf{n}(s).$$

Here the curvature of γ is defined by $\kappa(s) := \|\gamma''(s)\|$ for $s \in [0,1]$, and we

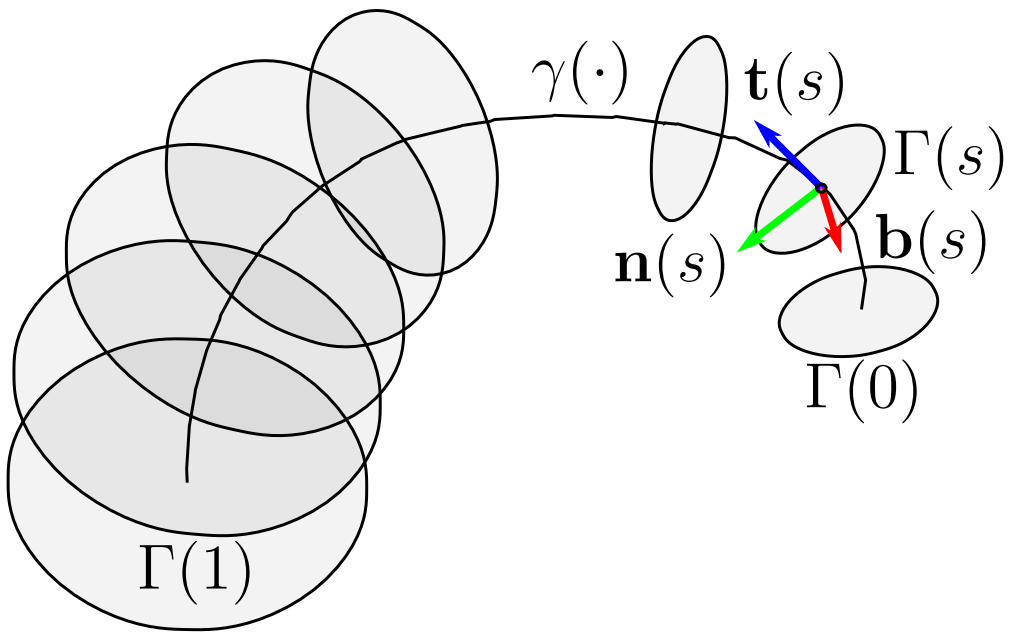

Figure 2: The Frenet frame of the planar centreline for a tubular domain Ω, represented by some of its intersection surfaces $\Gamma(s)$ for $s \in [0,1]$. The wall $\Gamma \subset \partial\Omega$ is not shown.

assume that $\min_{s\in[0,1]} \kappa(s) > 0$. It then follows that

$$\mathbf{t}' = \kappa\mathbf{n}, \quad \mathbf{n}' = -\kappa\mathbf{t} + \tau\mathbf{b}, \quad \text{and} \quad \mathbf{b}' = -\tau\mathbf{n} \tag{2.1}$$

where the number $\tau = \tau(s)$ for $s \in [0,1]$ is called the torsion of γ. All these facts concerning the Frenét coordinates can be found in any standard reference on elementary differential geometry, e.g., [20].

By $\mathbf{i}$, $\mathbf{j}$, and $\mathbf{k}$ denote the unit vectors in the direction of cartesian coordinate axes. For any point $\mathbf{r} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k} \in \mathbb{R}^3$ in a neighbourhood of γ we have

$$x\mathbf{i} + y\mathbf{j} + z\mathbf{k} = \gamma(s) + r\cos\theta\,\mathbf{n}(s) + r\sin\theta\,\mathbf{b}(s), \tag{2.2}$$

and hence we can use the triple $(s,r,\theta) \in [0,1]\times[0,\infty]\times[0,2\pi)$ as coordinates for $\mathbf{r}$. We shall call these coordinates (s,r,θ) the *tube coordinates.*

Using these coordinates, we can define the (open) interior of any tube as

$$\Omega := \{(s,r,\theta) : s \in (0,1), r \in [0,R(s)), \theta \in [0,2\pi)\} \subset \mathbb{R}^3 \tag{2.3}$$

where the differentiable function $R : [0,1] \to (0,\infty)$ gives the radius of the cross section at $s \in [0,1]$. We define

$$\begin{cases} \Gamma & := \{(s,R(s),\theta) : s \in (0,1), \theta \in [0,2\pi)\} \quad \text{and} \\ \Gamma(s) & := \{(s,r,\theta) : r \in [0,R_0), \theta \in [0,2\pi)\} \quad \text{for} \quad s \in [0,1]. \end{cases} \tag{2.4}$$

As before, we denote by $A(s)$ the area of $\Gamma(s)$ for $s \in [0,1]$. We call Γ the *wall*, and the circular plates $\Gamma(0)$, $\Gamma(1)$ are the *ends* of the tube Ω. The boundary of Ω satisfies $\partial\Omega = \overline{\Gamma} \cup \Gamma(0) \cup \Gamma(1)$. We make it as a standing assumption that

$$\eta(s) := R(s)\kappa(s) < 1 \quad \text{for all} \quad s \in [0,1] \tag{2.5}$$

in which case the tube does not fold onto itself, and the coordinate mapping associated to (2.2) is a diffeomorphism. The number $\eta(s)$ is called *curvature ratio* at $s \in [0,1]$, and typically both $\eta(s) \ll 1$ and $\eta'(s) \ll 1$. The *curvature factor* is defined by

$$\Xi = \Xi(s, r, \theta) := \frac{1}{1 - r\kappa(s)\cos\theta}. \tag{2.6}$$

Clearly $\Xi = 1 + r\kappa\cos\theta + \mathcal{O}(\eta^2)$ as $\eta \to 0$ since $|\Xi - 1 - r\kappa\cos\theta| \leq \eta^2(1 - \eta)^{-1}$.

For the derivation of Webster's model, we need the following facts about the coordinate system given by (2.2). We present the elementary computations required to obtain these facts in the appendix.

(i) The volume differential in tube coordinates is

$$dV = dx\,dy\,dz = \frac{r}{\Xi}\,ds\,dr\,d\theta. \tag{2.7}$$

(ii) The surface area element on the tube wall Γ is

$$dS = W\,d\theta\,ds \quad \text{where} \quad W(s) := R(s)\sqrt{R'(s)^2 + (\eta(s) - 1)^2} \tag{2.8}$$

(iii) The gradient ∇ can be written as

$$\nabla = \mathbf{t}(s)D_1 + \mathbf{n}(s)D_2 + \mathbf{b}(s)D_3 \tag{2.9}$$

where the differential operators D_i, $i = 1, 2, 3$, are given by

$$\begin{aligned} &D_1 := \Xi\left(\frac{\partial}{\partial s} - \tau\frac{\partial}{\partial\theta}\right), \qquad\qquad (2.10)\\ &D_2 := \cos\theta\frac{\partial}{\partial r} - \frac{\sin\theta}{r}\frac{\partial}{\partial\theta}, \quad D_3 := \sin\theta\frac{\partial}{\partial r} + \frac{\cos\theta}{r}\frac{\partial}{\partial\theta}. \end{aligned}$$

(iv) Finally, the exterior normal derivative on Γ is given by

$$\nu \cdot \nabla = \frac{R}{W}\left(-R'\Xi\left(\frac{\partial}{\partial s} - \tau\frac{\partial}{\partial\theta}\right) + (1 - \kappa R)\frac{\partial}{\partial r}\right). \tag{2.11}$$

3 Approximation of the wave equation

In this section we present how the solutions of the wave equation

$$\frac{\partial^2 \phi}{\partial t^2} = c^2 \Delta \phi \quad \text{on the domain} \quad \mathbb{R}^+ \times \Omega \tag{3.1}$$

are related to a generalized Webster's equation in the domain that has been described in (2.3). We assume that the tube wall Γ, defined by (2.4), allows energy dissipation through it, and the energy loss is modelled by

$$\alpha \frac{\partial \phi}{\partial t} + \frac{\partial \phi}{\partial \nu} = 0 \quad \text{on} \quad \mathbb{R}^+ \times \Gamma \quad \text{where} \quad \alpha \geq 0. \tag{3.2}$$

Note that the Neumann boundary condition $\frac{\partial \phi}{\partial \nu} = 0$, i.e., $\alpha = 0$ in (3.2), describes a perfectly reflecting boundary leading to a lossless model. For the purpose of reprensenting the curvature of the tube, we define the *sound speed correction factor* by

$$\Sigma(s) := \left(1 + \tfrac{1}{4}\eta^2(s)\right)^{-1/2} \quad \text{where} \quad \eta(s) \quad \text{is given by (2.5).} \tag{3.3}$$

As shown in Section 4, Webster's equation is then given by

$$\frac{1}{A(s)} \frac{\partial}{\partial s}\left(A(s) \frac{\partial \psi}{\partial s}\right) - \frac{2\pi \alpha W(s)}{A(s)} \frac{\partial \psi}{\partial t} - \frac{1}{c^2 \Sigma(s)^2} \frac{\partial^2 \psi}{\partial t^2} = f \tag{3.4}$$

where $f \equiv 0$. Note that the boundary dissipation (3.2) gives rise to the second term in (3.4).

On the end surface $\Gamma(1)$ of tube Ω we use the Dirichlet boundary condition

$$\phi = 0 \quad \text{on} \quad \mathbb{R}^+ \times \Gamma(1) \tag{3.5}$$

that represents an acoustic open end. The same argument that produces (3.4) from (3.1) – (3.2) also produces the boundary condition $\psi(1, t) = 0$ from (3.5).

Recall that the wave equation (3.1) is controlled and observed from the boundary component $\Gamma(0)$ representing one end of the tube Ω. In this work, we use the scattering boundary conditions given already in (1.4):

$$\begin{aligned} c\frac{\partial \phi}{\partial \nu}(\mathbf{r}, t) + \frac{\partial \phi}{\partial t}(\mathbf{r}, t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, u(\mathbf{r}, t) \quad \text{and} \\ c\frac{\partial \phi}{\partial \nu}(\mathbf{r}, t) - \frac{\partial \phi}{\partial t}(\mathbf{r}, t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, y(\mathbf{r}, t) \end{aligned} \tag{3.6}$$

Treating these boundary conditions is somewhat more complicated that (3.5), and we make two additional assumptions on Ω to ensure that the surface $\Gamma(0)$ is "geometrically reflection-free":

$$A'(0) = 0 \quad \text{and} \quad \kappa(0) = 0. \tag{3.7}$$

As is shown in Section 4, then (3.6) imply the scattering boundary conditions

$$\begin{aligned} - c\frac{\partial \psi}{\partial s}(0,t) + \frac{\partial \psi}{\partial t}(0,t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\,\bar{u}(t) \quad \text{and} \\ - c\frac{\partial \psi}{\partial s}(0,t) - \frac{\partial \psi}{\partial t}(0,t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\,\bar{y}(t) \end{aligned} \tag{3.8}$$

for Webster's equation. Other kinds of boundary conditions, even nonlinear ones, on $\Gamma(0)$ are possible, and their treatment follows the lines of Section 4. The details are left to an interesting reader.

The results of this section require the unique solvability of the wave equation part in Fig. 1:

Proposition 3.1. *Let the input signal satisfy* $u \in C^2(\mathbb{R}_+; L^2(\Gamma(0)))$ *and let* $\phi_0 \in H^1(\Omega)$ *satisfy*

$$\Delta \phi_0 \in L^2(\Omega), \frac{\partial \phi_0}{\partial t} \in H^1(\Omega), \phi_0\big|_{\Gamma(1)} = 0, \frac{\partial \phi_0}{\partial \nu}\big|_{\Gamma(0)\cup\Gamma} \in L^2(\Gamma(0)\cup\Gamma). \tag{3.9}$$

Then there is a unique solution ϕ *of the wave equation* (3.1)*, satisfying regularity conditions* (1.6)*, the first (input) boundary condition in* (3.6)*, the boundary conditions* (3.2)*,* (3.5)*, and the compatible initial conditions*

$$\phi(\cdot,0) = \phi_0, \quad \frac{\partial \phi}{\partial t}(\cdot,0) = \frac{\partial \phi_0}{\partial t}(\cdot). \tag{3.10}$$

The output, given by the second equation in (3.6)*, satisfies* $y \in C(\mathbb{R}^+; L^2(\Gamma(0)))$.

This is a reformulation of [3, Theorem 4.1(ii) and Corollary 4.2]. When consistent signals and initial conditions are used in Fig. 1 for the Webster part, we prove *unique* solvability there as well but this is not needed in this paper.

Recall the feedforward coupling in Fig. 1 where both the wave equation and Webster's equation systems are boundary controlled by a common (apart from averaging over $\Gamma(0)$) external signal. To produce an exact cancellation of outputs in Fig. 1, we need to directly control the state of Webster's equation by the forcing functions F, G, and H

$$F(s,t) := -\frac{1}{A(s)}\frac{\partial}{\partial s}\left(A'(s)\left(\bar{\phi}(s) - \frac{1}{2\pi}\int_0^{2\pi}\phi(s,R(s),\theta)\,d\theta\right)\right); \tag{3.11}$$

$$G(s,t) := -\frac{2\pi\alpha W(s)}{A(s)}\frac{\partial}{\partial t}\left(\bar{\phi}(s) - \frac{1}{2\pi}\int_0^{2\pi}\phi(s,R(s),\theta)d\theta\right);\text{ and} \tag{3.12}$$

$$\begin{aligned} H(s,t) :=& \int_{\Gamma(s)}\frac{1}{\Xi}\nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\,dA - \frac{1}{A(s)}\int_{\Gamma(s)}E\Delta\phi dA \\ &+\tau(s)\frac{\partial}{\partial s}\left(\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right) - \frac{\alpha W(s)\eta(s)}{A(s)}\left(\int_0^{2\pi}\frac{\partial\phi}{\partial t}(s,R(s),\theta)\cos\theta d\theta\right)\end{aligned} \tag{3.13}$$

where the *error function* is defined by

$$E(s,r,\theta) := \frac{1}{\Xi^2} - \frac{1}{\Sigma(s)^2} = -2r\kappa(s)\cos\theta + \kappa(s)^2(r^2\cos^2\theta - R(s)^2/4). \tag{3.14}$$

Now we are ready to give the main result of this paper.

Theorem 3.2. *Assume that* $\phi : \overline{\mathbb{R}^+}\times\Omega\to\mathbb{R}$ *is a solution of the wave equation* (3.1) *satisfying the regularity properties* (1.6) *and the boundary conditions* (3.2) *and* (3.5).

(i) *The averaged solution* $\bar{\phi} : \overline{\mathbb{R}^+}\times(0,1)\to\mathbb{R}$*, defined by*

$$\bar{\phi} = \frac{1}{A(s)}\int_{\Gamma(s)}\phi dA,$$

satisfies the regularity conditions

$$\bar{\phi}\in C^2(\mathbb{R}^+;L^2(0,1)) \quad \text{and} \quad \frac{\partial\bar{\phi}}{\partial s}\in C^1(\mathbb{R}^+;L^2(0,1)), \tag{3.15}$$

(ii) *The forcing terms* $F = F(s,t)$*,* $G = G(s,t)$*, and* $H = H(s,t)$ *(as defined in* (3.11) – (3.13)*) satisfy* $F\in C(\mathbb{R}^+;L^2(0,1))$ *and* $G\in C^1(\mathbb{R}^+;L^2(0,1))$*. If, in addition,* $\tau(s) = 0$ *for all* s *in* (3.13)*, then* $H\in C^1(\mathbb{R}^+;L^2(0,1))$*.*

(iii) *If* $\tau(s) = 0$ *in* (3.13)*, then the averaged solution* $\bar{\phi}$ *is a weak solution of*

$$\begin{aligned}&\frac{1}{A(s)}\frac{\partial}{\partial s}\left(A(s)\frac{\partial\bar{\phi}}{\partial s}\right) - \frac{2\pi\alpha W(s)}{A(s)}\frac{\partial\bar{\phi}}{\partial t} - \frac{1}{c^2\Sigma(s)^2}\frac{\partial^2\bar{\phi}}{\partial t^2} \\ &= F + G + H.\end{aligned} \tag{3.16}$$

(iv) *If ϕ satisfies the control/observation boundary conditions* (3.6) *and* $R'(0) = \kappa(0) = \tau(0) = 0$*, then $\bar{\phi}$ satisfies the corresponding boundary conditions* (3.8)*.*

This theorem is proved in Section 5. Claim (iii) means plainly that

$$\int_0^T \int_0^1 \left(-\frac{\partial \bar{\phi}}{\partial s} \frac{\partial \zeta}{\partial s} - \frac{1}{c^2 \Sigma(s)} \frac{\partial^2 \bar{\phi}}{\partial t^2} \zeta \right) A(s) ds dt - \int_0^T \int_0^1 2\pi\alpha W(s) \frac{\partial \bar{\phi}}{\partial t} \zeta ds dt$$
$$= \int_0^T \int_0^1 (F(s,t) + G(s,t) + H(s,t)) \zeta(s,t) A(s) ds dt \tag{3.17}$$

for all test functions $\zeta \in C_0^\infty((0,1) \times (0,T))$ and all $T > 0$. Claims (iii) and (iv) state that the feed-forward connection in Fig. 1 is well-defined, and the output on the right vanishes.

All the solutions and signals are *functions* by claims (i) and (ii). If equations (3.4) and (3.8) together with $\psi(1,t) = 0$ (corresponding (3.5)) are interpreted as a scattering passive linear dynamical system (i.e., a system node) S_w on the state space $X_w = H^1_{\{1\}}(0,1) \times L^2(0,1)$ as in [3, Theorem 5.1], it is, in particular, a *well-posed linear system* in the sense of [16, Definition 2.7], [27]. Thus, the function $x := \begin{bmatrix} \bar{\phi} \\ \rho \frac{\partial \bar{\phi}}{\partial t} \end{bmatrix}$ is the *unique strong solution in* X_w as defined in [27, Definition 3.8.1 and Theorem 4.3.1] of the dynamics associated to S_w:

$$\begin{bmatrix} \frac{\partial x}{\partial t}(t) \\ \bar{y}(t) \end{bmatrix} = S_w \begin{bmatrix} x(t) \\ \bar{u}(t) \\ f(t) \end{bmatrix} \quad \text{for almost all} \quad t \geq 0$$

where $f := F + G + H$; see, e.g., [16, Section 2].

4 From wave equation to Webster's equation

In this section, we give formal computations leading from the wave equation to Webster's equation.

Derivation of Webster's equation

To derive Webster's equation (3.4), we first obtain a weak formulation of the wave equation (1.1) – (3.2) in terms of tube coordinates. Open portions of the tube Ω are defined by

$$\Omega(s_0, s_1) = \{(s, r, \theta) : s \in (s_0, s_1), r \in [0, R(s)), \theta \in [0, 2\pi)\}$$

for $0 \le s_0 < s_1 \le 1$. We denote $\Gamma(s_0, s_1) := \Gamma \cap \overline{\Omega(s_0, s_1)}$. On the cross sectional surface $\Gamma(s_0)$ we have $\nu = -\mathbf{t}(s_0)$, and similarly we have $\nu = \mathbf{t}(s_1)$ on $\Gamma(s_1)$. Thus by (2.9) – (2.6) we get for the exterior normal derivatives

$$\frac{1}{\Xi}\frac{\partial}{\partial \nu} = -\left(\frac{\partial}{\partial s} - \tau(s_0)\frac{\partial}{\partial \theta}\right) \quad \text{for} \quad (s_0, r, \theta) \in \Gamma(s_0) \tag{4.1}$$

and

$$\frac{1}{\Xi}\frac{\partial}{\partial \nu} = \left(\frac{\partial}{\partial s} - \tau(s_1)\frac{\partial}{\partial \theta}\right) \quad \text{for} \quad (s_1, r, \theta) \in \Gamma(s_1). \tag{4.2}$$

Clearly $dA = r dr d\theta$ on both $\Gamma(s_0)$ and $\Gamma(s_1)$.

We use the Divergence Theorem and (4.1) – (4.2), and obtain

$$\begin{aligned}
&\int_{\Omega(s_0,s_1)} \Xi^{-1}\Delta\phi\, dV \\
&= -\int_{\Omega(s_0,s_1)} \nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\, dV + \int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial\nu} dA + \int_{\Gamma(s_0)\cup\Gamma(s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial\nu} dA \\
&= -\int_{\Omega(s_0,s_1)} \nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\, dV - \alpha\int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial t} dA \\
&- \int_{\Gamma(s_0)} \left(\frac{\partial\phi}{\partial s} - \tau(s_0)\frac{\partial\phi}{\partial\theta}\right) dA + \int_{\Gamma(s_1)} \left(\frac{\partial\phi}{\partial s} - \tau(s_1)\frac{\partial\phi}{\partial\theta}\right) dA \\
&= -\int_{\Omega(s_0,s_1)} \nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\, dV - \alpha\int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial t} dA \\
&+ \left(\int_{\Gamma(s_1)} \frac{\partial\phi}{\partial s} dA - \int_{\Gamma(s_0)} \frac{\partial\phi}{\partial s} dA\right) - \left(\tau(s_1)\int_{\Gamma(s_1)} \frac{\partial\phi}{\partial\theta} dA - \tau(s_0)\int_{\Gamma(s_0)} \frac{\partial\phi}{\partial\theta} dA\right)
\end{aligned}$$

where $\int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial\nu} dA = -\alpha\int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial\phi}{\partial t} dA$ is implied by (3.2). On the other hand, using the wave equation (1.1) and the volume element (2.7), we get

$$\begin{aligned}
\int_{\Omega(s_0,s_1)} \Xi^{-1}\Delta\phi\, dV &= \int_{\Omega(s_0,s_1)} \frac{1}{c^2\Xi}\frac{\partial^2\phi}{\partial t^2} dV = \int_{s_0}^{s_1}\left(\int_0^{2\pi}\int_0^{R(s)} \frac{1}{c^2\Xi^2}\frac{\partial^2\phi}{\partial t^2} r\, dr\, d\theta\right) ds \\
&= \int_{s_0}^{s_1}\left(\int_{\Gamma(s)} \frac{1}{c^2\Xi^2}\frac{\partial^2\phi}{\partial t^2} dA\right) ds.
\end{aligned}$$

Combining these two expressions for the same thing, we get

$$\begin{aligned}
L(s_0, s_1) = &\int_{\Omega(s_0,s_1)} \nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\, dV \\
&+ \tau(s_1)\int_{\Gamma(s_1)} \frac{\partial\phi}{\partial\theta} dA - \tau(s_0)\int_{\Gamma(s_0)} \frac{\partial\phi}{\partial\theta} dA
\end{aligned} \tag{4.3}$$

where

$$L(s_0,s_1) := \int_{\Gamma(s_1)} \frac{\partial \phi}{\partial s} dA - \int_{\Gamma(s_0)} \frac{\partial \phi}{\partial s} dA \tag{4.4}$$
$$- \alpha \int_{\Gamma(s_0,s_1)} \frac{1}{\Xi}\frac{\partial \phi}{\partial t} dA - \int_{s_0}^{s_1} \left(\int_{\Gamma(s)} \frac{1}{c^2 \Xi^2} \frac{\partial^2 \phi}{\partial t^2} dA \right) ds.$$

Remark 4.1. *Using* (2.9) – (2.6) *we note that*

$$-\frac{1}{\Xi}\nabla\left(\frac{1}{\Xi}\right) = \mathbf{t} r \left(\kappa' \cos\theta + \tau\kappa \sin\theta\right) + \mathbf{n}\frac{\kappa}{\Xi}. \tag{4.5}$$

We conclude that in the case of uncurved tube $\kappa = \tau = 0$, the right hand side of (4.3) *vanishes, and the we get $L(s_0, s_1) = 0$ for all $s_0, s_1 \in (0,1)$. The equation $L(s_0,s_1) = 0$ can be regarded as an integrated form of Webster's model.*

To obtain Webster's equation (3.4), we first study the limit

$$\lim_{s' \to s} \frac{L(s,s')}{s'-s}; \tag{4.6}$$

here $L(s,s')$ is given by (4.4). Recall that we aim at deriving (3.4) for the average

$$\bar{\phi} = \frac{1}{A(s)} \int_{\Gamma(s)} \phi dA.$$

The first two terms in (4.4) give us the elliptic part of Webster's equation. We rewrite

$$\frac{\partial}{\partial s}\left(\int_{\Gamma(s)} \phi dA \right) = \frac{\partial}{\partial s}\left(A(s)\bar{\phi} \right)$$

as

$$A(s)\frac{\partial \bar{\phi}}{\partial s} = -\frac{2R'(s)}{R(s)} \int_{\Gamma(s)} \phi dA + \frac{\partial}{\partial s}\left(\int_{\Gamma(s)} \phi dA \right)$$
$$= -A'(s)\bar{\phi} + \frac{\partial}{\partial s}\left(\int_{\Gamma(s)} \phi dA \right).$$

The last term is the limit as $s' \to s$ of

$$\frac{1}{s'-s}\left(\int_{\Gamma(s')} \phi dA - \int_{\Gamma(s)} \phi dA \right)$$
$$= \int_0^{2\pi} \int_0^{R(s')} \frac{\phi(s',r,\theta) - \phi(s,r,\theta)}{s'-s} r\, dr\, d\theta$$
$$+ \frac{R(s') - R(s)}{s'-s} \int_0^{2\pi} \left(\frac{1}{R(s') - R(s)} \int_{R(s)}^{R(s')} \phi(s,r,\theta) r\, dr \right) d\theta,$$

which gives

$$\frac{\partial}{\partial s}\left(\int_{\Gamma(s)} \phi dA\right) = \int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA + R(s)R'(s)\int_0^{2\pi} \phi(s, R(s), \theta)\, d\theta.$$

From these expressions, we now obtain

$$\int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA = A'(s)\left(\bar{\phi} - \frac{1}{2\pi}\int_0^{2\pi} \phi(s, R(s), \theta) d\theta\right) + A(s)\frac{\partial \bar{\phi}}{\partial s}.$$

Thus

$$\begin{aligned}
&\lim_{s' \to s} \frac{1}{s' - s}\left(\int_{\Gamma(s')} \frac{\partial \phi}{\partial s} dA - \int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA\right) = \frac{\partial}{\partial s}\int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA \qquad (4.7)\\
&= \frac{\partial}{\partial s}\left(A(s)\frac{\partial \bar{\phi}}{\partial s}\right) + \frac{\partial}{\partial s}\left(A'(s)\left(\bar{\phi}(s) - \frac{1}{2\pi}\int_0^{2\pi} \phi(s, R(s), \theta)\, d\theta\right)\right),
\end{aligned}$$

and the reader can recognise the elliptic term of Webster's equation on the last line.

For the boundary dissipation term in (4.4) we get

$$-\alpha \int_{\Gamma(s,s')} \frac{1}{\Xi}\frac{\partial \phi}{\partial t} dA = -\alpha \frac{\partial}{\partial t}\int_s^{s'} \left(\int_0^{2\pi} \phi(\tilde{s}, R(\tilde{s}), \theta)\frac{d\theta}{\Xi}\right) W(\tilde{s}) d\tilde{s}$$

by using (2.8). Thus

$$\begin{aligned}
&\lim_{s' \to s} \frac{-\alpha}{s' - s}\int_{\Gamma(s,s')} \frac{1}{\Xi}\frac{\partial \phi}{\partial t} dA\\
&= -\alpha \lim_{s' \to s}\left[\frac{1}{s' - s}\int_s^{s'} \left(\int_0^{2\pi} \frac{\partial \phi}{\partial t}(\tilde{s}, R(\tilde{s}), \theta)\frac{d\theta}{\Xi}\right) W(\tilde{s}) d\tilde{s}\right]\\
&= -\alpha W(s)\frac{\partial}{\partial t}\left(\int_0^{2\pi} \phi(s, R(s), \theta)\frac{d\theta}{\Xi}\right).
\end{aligned}$$

To proceed we note that by (2.6), the expression inside the parenthesis takes the form

$$\begin{aligned}
\int_0^{2\pi} \phi(s, R(s), \theta)\frac{d\theta}{\Xi} =& \int_0^{2\pi} \phi(s, R(s), \theta)(1 - \eta(s)\cos\theta) d\theta\\
=& 2\pi\bar{\phi}(s) - 2\pi\left(\bar{\phi}(s) - \frac{1}{2\pi}\int_0^{2\pi} \phi(s, R(s), \theta) d\theta\right)\\
&- \eta(s)\int_0^{2\pi} \phi(s, R(s), \theta)\cos\theta d\theta.
\end{aligned}$$

Thus we conclude that

$$\begin{aligned}\lim_{s'\to s}\frac{-\alpha}{s'-s}\int_{\Gamma(s,s')}\frac{1}{\Xi}\frac{\partial\phi}{\partial t}dA &= -2\pi\alpha W\frac{\partial\bar{\phi}}{\partial t}\\ &+ 2\pi\alpha W\frac{\partial}{\partial t}\left(\bar{\phi}(s)-\frac{1}{2\pi}\int_0^{2\pi}\phi(s,R(s),\theta)d\theta\right)\\ &+ \alpha W\eta\frac{\partial}{\partial t}\left(\int_0^{2\pi}\phi(s,R(s),\theta)\cos\theta d\theta\right).\end{aligned}\tag{4.8}$$

We take the by now familiar limit also in the final term in (4.4). We get

$$\begin{aligned}\lim_{s'\to s}\frac{1}{s'-s}\int_s^{s'}\left(\int_{\Gamma(s)}\frac{1}{c^2\Xi^2}\frac{\partial^2\phi}{\partial t^2}dA\right)ds &= \frac{1}{c^2}\int_{\Gamma(s)}\frac{1}{\Xi^2}\frac{\partial^2\phi}{\partial t^2}dA\\ = \frac{1}{c^2}\frac{\partial^2}{\partial t^2}\left(\int_{\Gamma(s)}\frac{\phi dA}{\Xi^2}\right).\end{aligned}\tag{4.9}$$

In order to obtain (3.4), we must express most of the contribution of the term containing $\int_{\Gamma(s)}\frac{\phi dA}{\Xi^2}$ in (4.9) using the averaged solution $\bar{\phi}$. Unfortunately, the curvature factor Ξ is not constant, and we cannot just bring it out from under the integral sign. To deal with this problem, we use the sound speed correction factor $\Sigma(s)$. It is clear that $\Sigma(s)^{-2}$ is the best estimate for function $\frac{1}{\Xi^2}$ over $\Gamma(s)$ in the sense of least squares. We have

$$\begin{aligned}\frac{1}{\Sigma(s)^2} &:= \frac{1}{A(s)}\int_{\Gamma(s)}\frac{dA}{\Xi^2}\\ &= \frac{1}{\pi R(s)^2}\int_0^{2\pi}\int_0^{R(s)}(1-r\kappa(s)\cos\theta)^2\, rdrd\theta = 1+\tfrac{1}{4}\eta^2(s)\end{aligned}\tag{4.10}$$

where the curvature ratio $\eta(s)$ is given by (2.5). The error function in (3.14) satisfies the identity

$$\Xi E = \frac{1}{\Xi}-\Xi-\tfrac{1}{4}\Xi\eta^2$$

With the aid of this we get the splitting

$$\int_{\Gamma(s)}\frac{\phi dA}{\Xi^2} = \frac{A(s)}{\Sigma(s)^2}\bar{\phi}+\int_{\Gamma(s)}E\phi dA$$

which implies

$$\frac{1}{c^2}\frac{\partial^2}{\partial t^2}\left(\int_{\Gamma(s)}\frac{\phi dA}{\Xi^2}\right) = \frac{A(s)}{c(s)^2}\frac{\partial^2\bar{\phi}}{\partial t^2}+\int_{\Gamma(s)}\frac{E}{c^2}\frac{\partial^2\phi}{\partial t^2}dA.\tag{4.11}$$

Here

$$c(s) := c\Sigma(s), \tag{4.12}$$

is the variable speed of sound.

We consider next the terms on the right hand side of (4.3). For the terms containing the torsion τ, we get

$$\lim_{s'\to s}\frac{1}{s'-s}\left(\tau(s')\int_{\Gamma(s')}\frac{\partial\phi}{\partial\theta}dA-\tau(s)\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right)=\frac{\partial}{\partial s}\left(\tau(s)\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right) \tag{4.13}$$

$$=\tau'(s)\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA+\tau(s)\frac{\partial}{\partial s}\left(\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right)=\tau(s)\frac{\partial}{\partial s}\left(\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right)$$

because $\int_0^{2\pi}\frac{\partial\phi}{\partial\theta}d\theta=0$. Then we proceed as in the first two terms of (4.4) with $\frac{\partial\phi}{\partial\theta}$ in place of ϕ, and obtain

$$\frac{\partial}{\partial s}\left(\int_{\Gamma(s)}\frac{\partial\phi}{\partial\theta}dA\right)=\int_{\Gamma(s)}\frac{\partial^2\phi}{\partial s\partial\theta}dA+R(s)R'(s)\int_0^{2\pi}\frac{\partial\phi}{\partial\theta}(s,R(s),\theta)\,d\theta=0,$$

since $\frac{\partial^2\phi}{\partial s\partial\theta}=\frac{\partial}{\partial\theta}\frac{\partial\phi}{\partial s}$ and $\int_0^{2\pi}\frac{\partial}{\partial\theta}\left(\frac{\partial\phi}{\partial s}\right)d\theta=0$.

We conclude that only the first term remains on the right hand side of (4.3). Taking the limit, we get

$$\lim_{s'\to s}\frac{1}{s'-s}\int_{\Omega(s,s')}\nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\,dV=\int_{\Gamma(s)}\frac{1}{\Xi}\nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi\,dA. \tag{4.14}$$

We now have everything we need for the limit (4.6). We put (4.7), (4.8), (4.9), and (4.11) together, and obtain

$$\begin{aligned}\frac{1}{A(s)}\lim_{s'\to s}\frac{L(s,s')}{(s'-s)}&=\frac{1}{A(s)}\frac{\partial}{\partial s}\left(\int_{\Gamma(s)}\frac{\partial\phi}{\partial s}dA\right)\\&-\frac{1}{A(s)}\lim_{s'\to s}\frac{\alpha}{s'-s}\int_{\Gamma(s,s')}\frac{1}{\Xi}\frac{\partial\phi}{\partial t}dA-\frac{1}{A(s)c^2}\frac{\partial^2}{\partial t^2}\left(\int_{\Gamma(s)}\frac{\phi dA}{\Xi^2}\right)\\&=\frac{1}{A(s)}\frac{\partial}{\partial s}\left(A(s)\frac{\partial\bar\phi}{\partial s}\right)-\frac{2\pi\alpha W(s)}{A(s)}\frac{\partial\bar\phi}{\partial t}-\frac{1}{c^2\Sigma(s)^2}\frac{\partial^2\bar\phi}{\partial t^2}\\&-F(s,t)-G(s,t)\\&+\frac{\alpha W(s)\eta(s)}{A(s)}\frac{\partial}{\partial t}\left(\int_0^{2\pi}\phi(s,R(s),\theta)\cos\theta d\theta\right)\\&+\frac{1}{A(s)}\int_{\Gamma(s)}E\Delta\phi dA\end{aligned} \tag{4.15}$$

where F and G are given by (3.11) – (3.12). Equation (4.15), together with the wave equation (4.3) and equations (4.13) and (4.14), now gives Webster's equation (3.16). The final error term H in (3.16) is given by (3.13). If we assume that the right hand side of (3.16) is negligible, we obtain the Webster's horn equation (3.4) with curvature and dissipation.

Webster's control/observation boundary conditions at $s = 0$

We next derive the boundary conditions (3.8) for Webster's equation at $s = 0$ that correspond to the boundary conditions of the wave equation on $\Gamma(0)$ in (3.6).

We get for smooth ϕ by using (4.1)

$$\begin{aligned}\int_{\Gamma(0)} \left(c\frac{\partial \phi}{\partial \nu} \pm \frac{\partial \phi}{\partial t} \right) dA = -c \int_{\Gamma(0)} \frac{\partial \phi}{\partial s}\, dA \pm \frac{\partial}{\partial t} \int_{\Gamma(0)} \phi \, dA \\ - c \int_{\Gamma(0)} \left(\frac{\partial \phi}{\partial s} - \tau(0)\frac{\partial \phi}{\partial \theta} \right) (\Xi - 1)\, dA\end{aligned} \tag{4.16}$$

since $\int_{\Gamma(0)} \frac{\partial \phi}{\partial \theta}\, dA = 0$.

The last term on the right hand side of (4.16) vanishes if $\kappa(0) = 0$ which will be assumed. Thus, our interest lies in the term

$$\int_{\Gamma(0)} \frac{\partial \phi}{\partial s}\, dA = \int_0^{2\pi} \int_0^{R(0)} \frac{\partial \phi}{\partial s}(s, r, \theta) r dr d\theta \quad \text{for} \quad s = 0.$$

We get

$$\begin{aligned}&\int_0^{2\pi} \int_0^{R(0)} \frac{\partial \phi}{\partial s}(s, r, \theta) r dr d\theta \\ =&\frac{\partial}{\partial s} \int_0^{2\pi} \left(\int_0^{R(s)} \phi(s, r, \theta) r dr + \int_{R(s)}^{R(0)} \phi(s, r, \theta) r dr \right) d\theta \\ =&\frac{\partial (A\bar{\phi})}{\partial s} - \frac{\partial}{\partial s} \left(\int_0^{2\pi} \int_{R(0)}^{R(s)} \phi(s, r, \theta) r dr d\theta \right).\end{aligned}$$

For the latter term on the right hand side we get

$$\begin{aligned}&\int_0^{2\pi} \left(\frac{\partial}{\partial s} \int_{R(0)}^{R(s)} \phi(s, r, \theta) r dr \right) d\theta \\ =&\int_0^{2\pi} \left(\lim_{s' \to s} \int_{R(0)}^{R(s')} \frac{\phi(s', r, \theta) - \phi(s, r, \theta)}{s' - s} r dr + \lim_{s' \to s} \frac{1}{s' - s} \int_{R(s)}^{R(s')} \phi(s, r, \theta) r dr \right) d\theta \\ =&\int_0^{2\pi} \int_{R(0)}^{R(s)} \frac{\partial \phi}{\partial s} r dr d\theta + R(s)R'(s) \int_0^{2\pi} \phi(s, R(s), \theta)\, d\theta\end{aligned}$$

and hence by setting $s = 0$ above we obtain

$$\int_{\Gamma(0)} \frac{\partial \phi}{\partial s}\, dA = \frac{\partial (A\bar{\phi})}{\partial s}\,(0) - R(0)R'(0) \int_0^{2\pi} \phi(0, R(0), \theta)\, d\theta.$$

We conclude from this and (4.16) that if $\kappa(0) = 0$, we have for all $t > 0$

$$\frac{1}{A(0)} \int_{\Gamma(0)} \left(c\frac{\partial \phi}{\partial \nu} \pm \frac{\partial \phi}{\partial t} \right) dA = -c\frac{\partial \bar{\phi}}{\partial s}(t, 0) \pm \frac{\partial \bar{\phi}}{\partial t}(t, 0) - K(t) \tag{4.17}$$

where

$$K(t) := \frac{cA'(0)}{A(0)} \left(\bar{\phi}(t, 0) - \frac{1}{2\pi} \int_0^{2\pi} \phi(t, 0, R(0), \theta)\, d\theta \right). \tag{4.18}$$

Now, if ϕ satisfies (3.6) then $\bar{\phi}$ satisfies

$$\begin{aligned} - c(0)\frac{\partial \bar{\phi}}{\partial s}(0, t) + \frac{\partial \bar{\phi}}{\partial t}(0, t) - K(t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, \bar{u}(t) \\ - c(0)\frac{\partial \bar{\phi}}{\partial s}(0, t) - \frac{\partial \bar{\phi}}{\partial t}(0, t) - K(t) &= 2\sqrt{\tfrac{c}{\rho A(0)}}\, \bar{y}(t) \end{aligned} \tag{4.19}$$

where $\bar{u}(t) := \frac{1}{A(0)} \int_{\Gamma(0)} u(\mathbf{r}, t) dA$. The assumption $\kappa(0) = 0$ is convenient here, too, since it implies $c(0) = c$ where $c(s) := c\Sigma(s)$ is the sound speed corrected by $\Sigma(s)$ in (3.3).

Thus, for smooth ϕ we have (3.6) $\Rightarrow$ (3.8) if $\kappa(0) = A'(0) = 0$ which we make a standing assumption in [15]; see also [22, p. 1992].

5 Proof of Theorem 3.2

In this section, we give the proofs based on the formal computations in the previous section. Some auxiliary results are needed first.

Proposition 5.1. *Assume that Ω is a tubular domain described by* (2.3) *and $\phi : \Omega \to \mathbb{R}$ satisfies the regularity assumptions $\phi \in C^1(\mathbb{R}_+; H^1(\Omega))$ and $\Delta\phi \in C(\mathbb{R}_+; L^2(\Omega))$ in* (1.6)*. By $\Gamma \subset \partial\Omega$ denote the walls of the tube. Then the boundary trace satisfies $\phi\big|_\Gamma \in C(\mathbb{R}^+; H^1(\Gamma))$.*

Proof. Let $\psi \in H^1(\Omega)$ such that $\Delta\psi \in L^2(\Omega)$. Since the radius function $R(s)$ is smooth, we may assume that the tube Ω is of constant diameter near its ends $\Gamma(0)$ and $\Gamma(1)$ — if not, use a diffeomorphims to obtain $R'(s) = 0$ for $s \in (0, \eta) \cup (1 - \eta, 1)$ for $\eta > 0$. We extend Ω from both ends to a longer tubular open set $\tilde{\Omega}$ that has a smooth boundary. This extension can be carried out in many ways but the function ψ must be extended to all of $\tilde{\Omega}$ so that (1.6) are satisfied by the extended function $\tilde{\psi}$. Let us consider the end $s = 0$.

For $s \in (-\eta/2, 1)$ define the extension by reflection

$$\tilde{\psi}(s, r, \theta) = \begin{cases} \psi(s, r, \theta) & \text{for } s \in (0, 1) \\ 3\psi(-s, r, \theta) - 2\psi(-2s, r, \theta) & \text{for } s \in (-1/2, 0) \end{cases} \tag{5.1}$$

and similarly at the other end. This extension gives us a function $\tilde{\psi}$ defined on a tube of length $1 + \eta$, and by smoothing the tube around the ends produces $\tilde{\Omega}$ having a smooth boundary with $\Omega \subset \tilde{\Omega}$ and $\Gamma \subset \partial\tilde{\Omega}$. It is easy to see that $\tilde{\psi}$ satisfies (1.6) since ψ does.

Thus $\tilde{\psi} \in H^1(\tilde{\Omega})$ with $\Delta\tilde{\psi} \in L^2(\tilde{\Omega})$ and $\frac{\partial\psi}{\partial\nu} \in L^2(\partial\Omega)$ where the boundary $\partial\tilde{\Omega}$ is smooth. By elliptic regularity theory (see [14, Remark 7.2 on p. 188]) (with $s = 3/2$, $m = 1$, $m_0 = 1$), we conclude that $\tilde{\psi} \in H^{3/2}(\tilde{\Omega})$. Using [14, Theorem 7.4] we conclude that $\tilde{\psi} \in D^{3/2}_{\Delta}(\tilde{\Omega}) := \{f \in H^{3/2}(\tilde{\Omega}) : \Delta f \in \Xi^{-1/2}(\Omega)\}$ where $\Xi^k(\Omega)$ has been defined on [14, p. 172] since $L^2(\tilde{\Omega}) \subset \Xi^{-1/2}(\Omega)$. It follows from [14, Theorem 7.4 on p. 188] that $\tilde{\psi}\big|_{\partial\tilde{\Omega}} \in H^1(\partial\tilde{\Omega})$ and thus $\psi\big|_{\Gamma} \in H^1(\Gamma)$ by restriction. Now, the trace mapping $\phi \mapsto \psi\big|_{\Gamma}$ is bounded from $E(\Delta; L^2(\Omega)) := \{f \in H^1(\Omega) : \Delta f \in L^2(\Omega)\}$ into $L^2(\Omega)$, and its range is in $H^1(\Gamma)$; it is thus bounded from $E(\Delta; L^2(\Omega))$ into $H^1(\Gamma)$. Since $\phi \in C(\mathbb{R}^+; E(\Delta; L^2(\Omega)))$, we conclude that $\phi\big|_{\Gamma} \in C(\mathbb{R}^+; H^1(\Gamma))$. □

Proposition 5.2. *Let* Γ *be as in Proposition 5.1. Define for* $g \in H^1(\Gamma)$ *the linear mapping* $\mathcal{B}$ *by*

$$(\mathcal{B}g)(s) := \frac{1}{2\pi}\int_0^{2\pi} g(s, R(s), \theta)\, d\theta \quad \textit{for} \quad s \in (0, 1).$$

Then

$$\mathcal{B} \in \mathcal{L}(H^k(\Gamma); H^k(0, 1)) \quad \textit{for all} \quad k \in \mathbb{R}.$$

Proof. For any $g \in C^\infty(\Gamma)$ and $w \in L^2(0, 1)$, we have $\mathcal{B}g \in C^\infty(0, 1)$ and

$$\begin{aligned} \langle \mathcal{B}g, w\rangle_{L^2(0,1)} &= \frac{1}{2\pi}\int_0^1 \left(\int_0^{2\pi} g(s, R(s), \theta)\, d\theta\right) w(s)\, ds \\ &= \int_0^1 \int_0^{2\pi} g(s, R(s), \theta)\frac{w(s)}{2\pi W(s)}\, dA = \langle g, \tilde{w}\rangle_{L^2(\Gamma)} \end{aligned}$$

where $dA = W(s) d\theta ds$ and $\tilde{w}(s, \theta) = \frac{w(s)}{2\pi W(s)}$. Because $C^\infty(\Gamma)$ is dense in $H^1(\Gamma)$, we conclude that $\mathcal{B}^* \in \mathcal{L}(H^{-k}(0, 1); H^{-k}(\Gamma))$ for all $k \geq 0$ where

$(\mathcal{B}^*w)(s,R(s),\theta) = \frac{w(s)}{2\pi W(s)}$ for all $w \in L^2(0,1))$ and $(s,R(s),\theta) \in \Gamma$. In particular, $\mathcal{B} \in \mathcal{L}(H_0^k(\Gamma); H_0^k(0,1))$ for all $k \geq 0$.

Define the spaces

$$W := \{r \in C(\Gamma) : r(s,R(s),\theta) = sr_0(\theta) + (1-s)r_1(\theta) \text{ for } r_0, r_1 \in C(\mathbb{T})\}$$

and $W^k := W \cap H^k(\Gamma)$ equipped with the norm of $H^k(\Gamma)$. Then W^k is a closed subspace of $H^k(\Gamma)$ for $k \geq 2$, and it is easy to see that $W^k \dot{+} H_0^k(\Gamma) = H^k(\Gamma)$. The operator $\mathcal{B}$ maps W^k boundedly onto linear functions on $(0,1)$ that are equipped with the norm of $H^k(0,1)$. We conclude that $\mathcal{B} \in \mathcal{L}(H^k(\Gamma); H^k(0,1))$ for $k \geq 2$ and $k = 0$. The claim follows from this by interpolation; see, e.g., [14, Theorem 5.1 on p. 27 and Theorem 7.7 on p. 36]. □

Proposition 5.3. *Let* Ω *be as in Proposition 5.1. For* $f \in L^2(\Omega)$*, define the linear mapping* $\mathcal{A}$ *by*

$$(\mathcal{A}f)(s) := \frac{1}{A(s)} \int_{\Gamma(s)} \phi dA \quad \textit{for} \quad s \in (0,1).$$

Then

$$\mathcal{A} \in \mathcal{L}(L^2(\Omega); L^2(0,1)) \cap \mathcal{L}(H^1(\Omega); H^1(0,1)).$$

Proof. For $\phi \in L^2(\Omega)$ we have by Hölder's inequality

$$\begin{aligned}\|\mathcal{A}\phi\|^2_{L^2(0,1)} &= \int_0^1 \left(\frac{1}{A(s)}\int_{\Gamma(s)} \phi dA\right)^2 ds \\ &\leq \int_0^1 \frac{1}{A(s)^2}\left(\int_{\Gamma(s)} \phi^2 dA\right)\left(\int_{\Gamma(s)} dA\right) ds \\ &\leq \int_0^1 \int_{\Gamma(s)} \frac{\Xi(s)}{A(s)}\phi^2 \cdot \frac{rdrd\theta ds}{\Xi(s)} \leq C_1 \|\phi\|^2_{L^2(\Omega)}\end{aligned}$$

where $C_1 := \max_{s\in[0,1]} \frac{\Xi(s)}{A(s)}$ because $dA = rdrd\theta$ on $\Gamma(s)$ and $dV$is given by (2.7). Using the operators $\mathcal{A}$ and $\mathcal{B}$, equation (4.7) takes the form

$$\frac{\partial}{\partial s}(\mathcal{A}\phi) = \mathcal{A}\left(\frac{\partial \phi}{\partial s}\right) + \frac{A'(s)}{A(s)}\left(\mathcal{B}(\phi\big|_\Gamma) - \mathcal{A}(\phi)\right) \tag{5.2}$$

first for $\phi \in C^\infty(\overline{\Omega})$, and then by density for all $\phi \in H^1(\Omega)$ and $\phi\big|_\Gamma \in H^{1/2}(\Gamma)$ and [9, Theorem 1.5.1.3]. It follows that $\|\frac{\partial}{\partial s}(\mathcal{A}\phi)\|_{L^2(0,1)} \leq C_1\|\mathbf{t} \cdot \nabla\phi\|_{L^2(0,1)} + \sup_{s\in[0,1]} \frac{A'(s)}{A(s)}\left(C_2\|\phi\big|_\Gamma\|_{L^2(\Gamma)} + C_1\|\phi\|_{L^2(0,1)}\right) \leq C\|\phi\|_{H^1(\Omega)}$ for all $\phi \in H^1(\Omega)$ for some $C < \infty$. □

We are now ready to give a rigorous proof for Theorem 3.2.

Proof of Theorem 3.2. Claim (i): By (1.6) we have $\phi \in C^2(\mathbb{R}^+; L^2(\Omega))$ and $\frac{\partial\phi}{\partial s} \in C^1(\mathbb{R}^+; L^2(0,1))$. Thus an application of Propositions 5.3 and 5.2 implies that $\bar{\phi} \in C^2(\mathbb{R}^+; L^2(0,1))$ and $\frac{\partial\bar{\phi}}{\partial s} \in C^1(\mathbb{R}^+; L^2(0,1))$, as desired.

Claim (ii): The functions $A(s), A(s)^{-1}, \eta(s), W(s), \Xi^{-1}\nabla(\Xi^{-1})$, and E are all smooth by assumptions. Hence, by inspection of formulae (3.11) – (3.13) we need to show, in addition to claim (i) of this theorem, that $\frac{\partial}{\partial s}\left(\mathcal{B}\phi\big|_{\Gamma}\right) \in C(\mathbb{R}^+; L^2(0,1))$ in order to prove that $F \in C(\mathbb{R}^+; L^2(0,1))$ and $G, H \in C^1(\mathbb{R}^+; L^2(0,1))$. This follows directly from Propositions 5.1 and 5.2.

Claim (iii): By 1.6 and (3.15), all the computations in Section 4 hold pointwise almost everywhere, apart from (4.7); $\bar{\phi}$ might not have two derivatives with respect to s. To deal with this, we interpret the second derivative in (4.7) in the sense of distributions.[1]

For $|h| < s < 1-|h|$ we may write, in the notation of section 4,

$$L(s, s+h) = \int_{\Omega(s+h,s)} \nabla\left(\frac{1}{\Xi}\right)\cdot\nabla\phi dV, \tag{5.3}$$

where

$$\begin{aligned} L(s,s+h) = & \int_{\Gamma(s+h)} \frac{\partial\phi}{\partial s} dA - \int_{\Gamma(s)} \frac{\partial\phi}{\partial s} dA \\ & - \alpha\int_{\Gamma(s+h,s)} \frac{1}{\Xi}\frac{\partial\phi}{\partial t} dA - \int_s^{s+h}\int_{\Gamma(\sigma)} \frac{1}{c^2\Xi^2}\frac{\partial^2\phi}{\partial t} dA d\sigma. \end{aligned}$$

Note that here we used the assumption that the torsion τ vanishes. Take now an arbitrary function $\zeta \in C_0^\infty((0,1)\times(0,T))$, and choose h sufficiently small, so that the spatial support of ζ is contained in the interval $(2|h|, 1-2|h|)$. By a simple change of variables, we see that

$$\int_0^1\int_{\Gamma(s+h)} \frac{\partial\phi}{\partial s} dA \zeta(s,t) ds = \int_0^1\int_{\Gamma(s)} \frac{\partial\phi}{\partial s} dA \eta(s-h) ds. \tag{5.4}$$

Next we multiply (5.3) by ζ, integrate over s, divide by h and use (5.4). This leads to

$$\begin{aligned} \int_0^1 \frac{L(s,s+h)}{h}\zeta(s,t) ds = & \int_0^1\int_{\Gamma(s)} \frac{\partial\phi}{\partial s} dA \frac{\zeta(s-h,t)-\zeta(s,t)}{h} ds \\ & - \alpha\int_0^1 \frac{1}{h}\int_{\Gamma(s+h,s)} \frac{1}{\Xi}\frac{\partial\phi}{\partial t} dA\zeta(s,t) ds \\ & - \int_0^1 \frac{1}{h}\int_s^{s+h}\int_{\Gamma(\sigma)} \frac{1}{c^2\Xi^2}\frac{\partial^2\phi}{\partial t^2} dA d\sigma ds. \end{aligned}$$

---

[1] The (im)patient (reader) may now skip the rest of the proof...

Then let h tend to zero. The limit of the first term on the right is

$$\lim_{h \to 0} \int_0^1 \int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA \frac{\zeta(s-h,t) - \zeta(s,t)}{h} ds = - \int_0^1 \int_{\Gamma(s)} \frac{\partial \phi}{\partial s} dA \frac{\partial \zeta(s,t)}{\partial s} ds$$

In the other terms, we may pass to the limit $h \to 0$ (or, equivalently, $s' \to s$) as in Section 4, since all the formulae after (4.7) hold pointwise almost everywhere. An integration in time then leads to (3.17).

Claim (iv): As argued in Section 4, we have (3.6) $\Rightarrow$ (3.8) for smooth ϕ if $\kappa(0) = R'(0) = 0$. Since $\frac{\partial \phi}{\partial \nu}(\cdot, t) \in L^2(\Gamma(0))$ and $\frac{\partial \phi}{\partial t}\big|_{\Gamma(0)}(\cdot, t) \in H^{1/2}(\Gamma(0))$ by (1.6), and the claim follows because the averaging over $\Gamma(0)$ is bounded linear functional on $L^2(\Gamma(0))$. $\square$

References

[1] A. Aalto. A low-order glottis model with nonturbulent flow and mechanically coupled acoustic load. Master's thesis, Helsinki University of Technology, 2009.

[2] A. Aalto, D. Aalto, J. Malinen, and M. Vainio. Modal locking between vocal fold and vocal tract oscillations. arXiv:1211.4788, 23 pp., 2012. Submitted.

[3] A. Aalto, T. Lukkari, and J. Malinen. Acoustic wave guides as infinite-dimensional dynamical systems. arXiv:1211.7000, 28 pp. + 6 pp. appendix, 2012.

[4] A. Aalto and J. Malinen. Composition of passive boundary control systems. *MCRF*, 2012.

[5] D. Aalto, A. Huhtala, A. Kivelä, J. Malinen, P. Palo, J. Saunavaara, and M. Vainio. How far are vowel formants from computed vocal tract resonances? arXiv:1208.5963, 13 pp., 2012.

[6] T. Chiba and M. Kajiyama. *The Vowel, Its Nature and Structure.* Phonetic Society of Japan, 1958.

[7] E. Eisner. Complete solutions of the "Webster" horn equation. *J. Acoust. Soc. Am.*, 41(4):1126–1146, 1967.

[8] G. Fant. *Acoustic Theory of Speech Production.* Mouton, The Hague, 1960.

[9] P. Grisvard. *Elliptic problems in non-smooth domains.* Pitman, 1985.

[10] A. Hannukainen, T. Lukkari, J. Malinen, and P. Palo. Vowel formants from the wave equation. *J. Acoust. Soc. Am.*, 122(1):EL1–EL7, 2007.

[11] P. Kuchment and H. Zeng. Convergence of spectra of mesoscopic systems collapsing onto a graph. *J. Math. Anal. Appl.*, 258(2):671–700, 2001.

[12] M. B. Lesser and J. A. Lewis. Applications of matched asymptotic expansion methods to acoustics. I. The Webster horn equation and the stepped duct. *J. Acoust. Soc. Am.*, 51(5):1664–1669, 1971.

[13] M. B. Lesser and J. A. Lewis. Applications of matched asymptotic expansion methods to acoustics. II. The open-ended duct. *J. Acoust. Soc. Am.*, 52(5):1406–1410, 1972.

[14] J. L. Lions and E. Magenes. *Non-homogenous boundary value problems and applications I*, volume 181 of *Die Grundlehren der mathematischen Wissenchaften.* Springer Verlag, Berlin, 1972.

[15] T. Lukkari and J. Malinen. A posteriori error estimates for Webster's equation in wave propagation. Manuscript, 24 pages, 2013.

[16] J. Malinen, O. Staffans, and G. Weiss. When is a linear system conservative? *Quart. Appl. Math.*, 64(1):61–91, 2006.

[17] J. Malinen and O. J. Staffans. Conservative boundary control systems. *J. Differ. Equations*, 231(1):290–312, 2006.

[18] J. Malinen and O. J. Staffans. Impedance passive and conservative boundary control systems. *CAOT*, 2(1):279–300, 2007.

[19] A. H. Nayfeh and D. P. Telionis. Acoustic propagation in ducts with varying cross sections. *J. Acoust. Soc. Am.*, 54(6):1654–1661, 1973.

[20] Andrew Pressley. *Elementary differential geometry.* Springer Undergraduate Mathematics Series. Springer-Verlag London Ltd., London, second edition, 2010.

[21] S. Rienstra. Sound transmission in slowly varying circular and annular lined ducts with flow. *J. Fluid Mech.*, 380:279–296, 1999.

[22] S. W. Rienstra. Webster's horn equation revisited. *SIAM J. Appl. Math.*, 65(6):1981–2004, 2005.

[23] S. W. Rienstra and W. Eversman. A numerical comparison between the multiple-scales and finite-element solution for sound propagation in lined flow ducts. *J. Fluid Mech.*, 437:367–384, 2001.

[24] J. Rubinstein and M. Schatzman. Variational problems on multiply connected thin strips i: Basic estimates and convergence of the laplacian spectrum. *Arch. Rational Mech. Anal.*, 160(4):271–308, 2001.

[25] V. Salmon. Generalized plane wave horn theory. *J. Acoust. Soc. Am.*, 17(3):199–211, 1946.

[26] V. Salmon. A new family of horns. *J. Acoust. Soc. Am*, 17(3):212–218, 1946.

[27] O. J. Staffans. *Well-Posed Linear Systems.* Cambridge University Press, Cambridge, 2004.

[28] A. G. Webster. Acoustic impedance, and the theory of horns and of the phonograph. *Proc. Natl. Acad. Sci. USA*, 5:275–282, 1919.

A The surface area element

By (2.3), the wall Γ can be parametrized as

$$\mathbf{r}(s,\theta) = \gamma(s) + R(s)(\mathbf{n}\cos\theta + \mathbf{b}\sin\theta)$$

where $s \in [0,1]$ and $\theta \in [0,2\pi]$. Hence the surface area element can be found by using the formula

$$dS = \left|\tfrac{\partial \mathbf{r}}{\partial s} \times \tfrac{\partial \mathbf{r}}{\partial \theta}\right|\, ds\, d\theta.$$

We have $\frac{\partial \mathbf{r}}{\partial \theta} = R(s)(-\mathbf{n}(s)\sin\theta + \mathbf{b}(s)\cos\theta)$, and by (2.1) we get

$$\frac{\partial \mathbf{r}}{\partial s} = \mathbf{t}(1-\kappa R) + \mathbf{n}(R'\cos\theta - R\tau\sin\theta) + \mathbf{b}(R'\sin\theta + R\tau\cos\theta).$$

Since $\{\mathbf{t},\mathbf{n},\mathbf{b}\}$ is a right hand orthogonal system, we see that

$$\frac{\partial \mathbf{r}}{\partial s} \times \mathbf{n} = \mathbf{b}(1-\kappa R) - \mathbf{t}(R'\sin\theta + R\tau\cos\theta)$$

and

$$\frac{\partial \mathbf{r}}{\partial s} \times \mathbf{b} = -\,\mathbf{n}(1-\kappa R) + \mathbf{t}(R'\cos\theta - R\tau\sin\theta).$$

Hence the exterior normal derivative lies in the direction of

$$-\frac{\partial \mathbf{r}}{\partial s} \times \frac{\partial \mathbf{r}}{\partial \theta} = R[-\mathbf{t}R' + \mathbf{n}(1-\kappa R)\cos\theta + \mathbf{b}(1-\kappa R)\sin\theta] \tag{A.1}$$

since $\kappa R < 1$. Now (2.8) follows by orthonormality, see (2.5).

B The volume element

To verify (2.7) we need to compute the Jacobian of the coordinate trasformation:

$$\frac{\partial(s,r,\theta)}{\partial(x,y,z)} = \begin{vmatrix} \frac{\partial s}{\partial x} & \frac{\partial s}{\partial y} & \frac{\partial s}{\partial z} \\ \frac{\partial r}{\partial x} & \frac{\partial r}{\partial y} & \frac{\partial r}{\partial z} \\ \frac{\partial \theta}{\partial x} & \frac{\partial \theta}{\partial y} & \frac{\partial \theta}{\partial z} \end{vmatrix}$$

$$= \begin{vmatrix} \Xi(\mathbf{t}\cdot\mathbf{i}) & \Xi(\mathbf{t}\cdot\mathbf{j}) & \Xi(\mathbf{t}\cdot\mathbf{k}) \\ [\cos\theta\,\mathbf{n}+\sin\theta\,\mathbf{b}]\cdot\mathbf{i} & [\cos\theta\,\mathbf{n}+\sin\theta\,\mathbf{b}]\cdot\mathbf{j} & [\cos\theta\,\mathbf{n}+\sin\theta\,\mathbf{b}]\cdot\mathbf{k} \\ \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{i} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{j} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{k} \end{vmatrix}$$

$$= \Xi\cos\theta \begin{vmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{n}\cdot\mathbf{i} & \mathbf{n}\cdot\mathbf{j} & \mathbf{n}\cdot\mathbf{k} \\ \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{i} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{j} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{k} \end{vmatrix}$$

$$+ \Xi\sin\theta \begin{vmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{b}\cdot\mathbf{i} & \mathbf{b}\cdot\mathbf{j} & \mathbf{b}\cdot\mathbf{k} \\ \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{i} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{j} & \left[-\tau\Xi\mathbf{t}-\frac{\sin\theta}{r}\mathbf{n}+\frac{\cos\theta}{r}\mathbf{b}\right]\cdot\mathbf{k} \end{vmatrix}$$

$$= \frac{\Xi\cos^2\theta}{r} \begin{vmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{n}\cdot\mathbf{i} & \mathbf{n}\cdot\mathbf{j} & \mathbf{n}\cdot\mathbf{k} \\ \mathbf{b}\cdot\mathbf{i} & \mathbf{b}\cdot\mathbf{j} & \mathbf{b}\cdot\mathbf{k} \end{vmatrix} - \frac{\Xi\sin^2\theta}{r} \begin{vmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{b}\cdot\mathbf{i} & \mathbf{b}\cdot\mathbf{j} & \mathbf{b}\cdot\mathbf{k} \\ \mathbf{n}\cdot\mathbf{i} & \mathbf{n}\cdot\mathbf{j} & \mathbf{n}\cdot\mathbf{k} \end{vmatrix} = \frac{\Xi}{r} \begin{vmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{n}\cdot\mathbf{i} & \mathbf{n}\cdot\mathbf{j} & \mathbf{n}\cdot\mathbf{k} \\ \mathbf{b}\cdot\mathbf{i} & \mathbf{b}\cdot\mathbf{j} & \mathbf{b}\cdot\mathbf{k} \end{vmatrix}.$$

We write the basis change as $x\mathbf{i}+y\mathbf{j}+z\mathbf{k}=\alpha\mathbf{t}+\beta\mathbf{n}+\gamma\mathbf{b}$, and thus we see that

$$\begin{bmatrix} \alpha \\ \beta \\ \gamma \end{bmatrix} = A \begin{bmatrix} x \\ y \\ z \end{bmatrix} \quad \text{where } A := \begin{bmatrix} \mathbf{t}\cdot\mathbf{i} & \mathbf{t}\cdot\mathbf{j} & \mathbf{t}\cdot\mathbf{k} \\ \mathbf{n}\cdot\mathbf{i} & \mathbf{n}\cdot\mathbf{j} & \mathbf{n}\cdot\mathbf{k} \\ \mathbf{b}\cdot\mathbf{i} & \mathbf{b}\cdot\mathbf{j} & \mathbf{b}\cdot\mathbf{k} \end{bmatrix}.$$

Because both the bases $\{\mathbf{i},\mathbf{j},\mathbf{k}\}$ and $\{\mathbf{t},\mathbf{n},\mathbf{b}\}$ are orthogonal, the basis change matrix A is unitary. Hence its determinant is of absolute value 1, and $\left|\frac{\partial(s,r,\theta)}{\partial(x,y,z)}\right| = \frac{\Xi}{r}$. From this we conclude that (2.7) holds.

C The gradient and the normal derivative on Γ

We have

$$\nabla = \mathbf{i}\frac{\partial}{\partial x} + \mathbf{j}\frac{\partial}{\partial y} + \mathbf{k}\frac{\partial}{\partial z}.$$

Suppose that $\phi = \phi(s,r,\theta)$ where s, r, and θ are functions of x, y, and z. We have by the chain rule $\frac{\partial}{\partial x} = \frac{\partial s}{\partial x}\frac{\partial}{\partial s} + \frac{\partial r}{\partial x}\frac{\partial}{\partial r} + \frac{\partial \theta}{\partial x}\frac{\partial}{\partial \theta}$, and hence we need to compute $\frac{\partial s}{\partial x}$, $\frac{\partial r}{\partial x}$, and $\frac{\partial \theta}{\partial x}$. By differentiating (2.2) with respect to x, we get by using (2.1)

$$\begin{aligned}
\mathbf{i} = {} & (1 - r\kappa\cos\theta)\,\frac{\partial s}{\partial x}\mathbf{t}(s) \\
& \left(-r\tau\sin\theta\frac{\partial s}{\partial x} + \cos\theta\frac{\partial r}{\partial x} - r\sin\theta\frac{\partial \theta}{\partial x}\right)\mathbf{n}(s) \\
& + \left(r\tau\cos\theta\frac{\partial s}{\partial x} + \sin\theta\frac{\partial r}{\partial x} + r\cos\theta\frac{\partial \theta}{\partial x}\right)\mathbf{b}(s).
\end{aligned}$$

Because $\mathbf{t}(s)$, $\mathbf{n}(s)$, and $\mathbf{b}(s)$ are orthonormal, we get

$$\begin{bmatrix} 1 - r\kappa\cos\theta & 0 & 0 \\ -r\tau\sin\theta & \cos\theta & -\sin\theta \\ r\tau\cos\theta & \sin\theta & \cos\theta \end{bmatrix} \begin{bmatrix} \frac{\partial s}{\partial x} \\ \frac{\partial r}{\partial x} \\ r\frac{\partial \theta}{\partial x} \end{bmatrix} = \begin{bmatrix} \mathbf{t}(s) \\ \mathbf{n}(s) \\ \mathbf{b}(s) \end{bmatrix} \cdot \mathbf{i}.$$

By the topmost row, $\frac{\partial s}{\partial x} = \frac{\mathbf{t}(s)}{1 - r\kappa\cos\theta} \cdot \mathbf{i}$, and using this gives

$$\begin{bmatrix} \frac{\partial r}{\partial x} \\ r\frac{\partial \theta}{\partial x} \end{bmatrix} = \begin{bmatrix} \cos\theta & \sin\theta \\ -\sin\theta & \cos\theta \end{bmatrix} \begin{bmatrix} \mathbf{n}(s) + \frac{r\tau\sin\theta}{1 - r\kappa\cos\theta}\mathbf{t}(s) \\ \mathbf{b}(s) - \frac{r\tau\cos\theta}{1 - r\kappa\cos\theta}\mathbf{t}(s) \end{bmatrix} \cdot \mathbf{i}$$

or

$$\begin{cases} \frac{\partial s}{\partial x} & = \frac{\mathbf{t}(s)}{1 - r\kappa\cos\theta} \cdot \mathbf{i} \\ \frac{\partial r}{\partial x} & = [\cos\theta\,\mathbf{n}(s) + \sin\theta\,\mathbf{b}(s)] \cdot \mathbf{i} \\ \frac{\partial \theta}{\partial x} & = \left[-\frac{\tau}{1 - r\kappa\cos\theta}\mathbf{t}(s) - \frac{\sin\theta}{r}\mathbf{n}(s) + \frac{\cos\theta}{r}\mathbf{b}(s)\right] \cdot \mathbf{i} \end{cases}$$

We now conclude that $\frac{\partial \phi}{\partial x} = F \cdot \mathbf{i}$ where

$$\begin{aligned}
F(s, r, \theta) := {} & \mathbf{t}(s)\left(\frac{\frac{\partial \phi}{\partial s} - \tau\frac{\partial \phi}{\partial \theta}}{1 - r\kappa\cos\theta}\right) \\
& + \mathbf{n}(s)\left(\cos\theta\frac{\partial \phi}{\partial r} - \frac{\sin\theta}{r}\frac{\partial \phi}{\partial \theta}\right) + \mathbf{b}(s)\left(\sin\theta\frac{\partial \phi}{\partial r} + \frac{\cos\theta}{r}\frac{\partial \phi}{\partial \theta}\right).
\end{aligned}$$

A similar argument shows that also $\frac{\partial \phi}{\partial y} = F \cdot \mathbf{j}$ and $\frac{\partial \phi}{\partial z} = F \cdot \mathbf{k}$ hold, and hence $\nabla\phi = F$. The formulas (2.9) and (2.10) can be read from this.

It remains to compute the normal derivative $\frac{\partial}{\partial \nu}$ on the tube wall Γ. By (A.1), (2.8), and (2.9) we get

$$\begin{aligned}
\nu \cdot \nabla &= \frac{R}{W}\left(-\mathbf{t}R' + (1 - \kappa R)(\mathbf{n}\cos\theta + \mathbf{b}\sin\theta)\right) \cdot (\mathbf{t}D_1 + \mathbf{n}D_2 + \mathbf{b}D_3) \\
&= \frac{R}{W}\left(-R'\Xi\left(\frac{\partial}{\partial s} - \tau\frac{\partial}{\partial \theta}\right) + (1 - \kappa R)\frac{\partial}{\partial r}\right),
\end{aligned}$$

as desired.

D The Laplacian

Let us proceed to compute $\Delta = \nabla^2$ in tube coordinates. We have

$$\begin{aligned} \nabla^2 &= (\mathbf{t}D_1 + \mathbf{n}D_2 + \mathbf{b}D_3)\cdot(\mathbf{t}D_1 + \mathbf{n}D_2 + \mathbf{b}D_3) \\ &= \mathbf{t}\cdot(D_1\mathbf{t}D_1) + \mathbf{t}\cdot(D_1\mathbf{n}D_2) + \mathbf{t}\cdot(D_1\mathbf{b}D_3) \\ &+ \mathbf{n}\cdot(D_2\mathbf{t}D_1) + \mathbf{n}\cdot(D_2\mathbf{n}D_2) + \mathbf{n}\cdot(D_2\mathbf{b}D_3) \\ &+ \mathbf{b}\cdot(D_3\mathbf{t}D_1) + \mathbf{b}\cdot(D_3\mathbf{n}D_2) + \mathbf{b}\cdot(D_3\mathbf{b}D_3). \end{aligned} \tag{D.1}$$

The first term in (D.1) takes the form

$$\mathbf{t}\cdot(D_1\mathbf{t}D_1) = \mathbf{t}\cdot[(D_1\mathbf{t})D_1 + \mathbf{t}D_1^2] = D_1^2$$

since $(1 - r\kappa\cos\theta)D_1\mathbf{t} = \frac{d\mathbf{t}}{ds} - \tau\frac{d\mathbf{t}}{d\theta} = \mathbf{n} - \mathbf{0} = \mathbf{n}$ which is orthogonal to $\mathbf{t}$.

The second term in (D.1) gives

$$\mathbf{t}\cdot(D_1\mathbf{n}D_2) = \mathbf{t}\cdot[(D_1\mathbf{n})D_2 + \mathbf{n}D_1D_2] = \mathbf{t}\cdot((D_1\mathbf{n})D_2) = -\frac{\kappa D_2}{1 - r\kappa\cos\theta}$$

because $(1 - r\kappa\cos\theta)D_1\mathbf{n} = \frac{d\mathbf{n}}{ds} - \tau\frac{d\mathbf{n}}{d\theta} = -\kappa\mathbf{t} + \tau\mathbf{b}$ and $\mathbf{t}\perp\mathbf{b}$.

The fifth term in (D.1) is as follows:

$$\mathbf{n}\cdot(D_2\mathbf{n}D_2) = \mathbf{n}\cdot[(D_2\mathbf{n})D_2 + \mathbf{n}D_2^2] = D_2^2$$

since $D_2\mathbf{n} = \cos\theta\frac{d\mathbf{n}}{dr} - \frac{\sin\theta}{r}\frac{d\mathbf{n}}{d\theta} = \mathbf{0}$ by virtue of the fact that $\mathbf{n} = \mathbf{n}(s)$.

The ninth term in (D.1) goes like this:

$$\mathbf{b}\cdot(D_3\mathbf{b}D_3) = \mathbf{b}\cdot[(D_3\mathbf{b})D_3 + \mathbf{n}D_3^2] = D_3^2$$

since $D_3\mathbf{b} = \sin\theta\frac{d\mathbf{b}}{dr} + \frac{\cos\theta}{r}\frac{d\mathbf{b}}{d\theta} = \mathbf{0}$ by virtue of the fact that $\mathbf{b} = \mathbf{b}(s)$.

All the remaining terms in (D.1) vanish by the facts that $D_2\mathbf{t} = D_2\mathbf{n} = D_2\mathbf{b} = D_3\mathbf{t} = D_3\mathbf{n} = D_3\mathbf{b} = \mathbf{0}$ and orthogonality of the vectors $\mathbf{t}$, $\mathbf{n}$, and $\mathbf{b}$. The laplacian now takes the form

$$\nabla^2 = D_1^2 + D_2^2 + D_3^2 - \kappa\Xi D_2 \tag{D.2}$$

where the operators D_1, D_2, and D_3 are given by (2.10), the curvature is denoted by κ, and the curvature factor Ξ is given by (2.6). We now have by (2.10)

$$\begin{aligned} \Xi^2 D_1^2 &= \frac{\partial^2}{\partial s^2} - 2\tau\frac{\partial^2}{\partial s\partial\theta} + \tau^2\frac{\partial^2}{\partial\theta^2} \\ &- r\Xi(\kappa\tau\sin\theta + \kappa'\cos\theta)\frac{\partial}{\partial s} + (r\tau\Xi(\kappa\tau\sin\theta + \kappa'\cos\theta) - \tau')\frac{\partial}{\partial\theta}; \end{aligned}$$

$$D_2^2 = \cos^2\theta \frac{\partial^2}{\partial r^2} - \frac{\sin 2\theta}{r}\frac{\partial^2}{\partial r\partial\theta} + \frac{\sin^2\theta}{r^2}\frac{\partial^2}{\partial\theta^2} + \frac{\sin^2\theta}{r}\frac{\partial}{\partial r} + \frac{\sin 2\theta}{r^2}\frac{\partial}{\partial\theta};$$

and

$$D_3^2 = \sin^2\theta \frac{\partial^2}{\partial r^2} + \frac{\sin 2\theta}{r}\frac{\partial^2}{\partial r\partial\theta} + \frac{\cos^2\theta}{r^2}\frac{\partial^2}{\partial\theta^2} + \frac{\cos^2\theta}{r}\frac{\partial}{\partial r} - \frac{\sin 2\theta}{r^2}\frac{\partial}{\partial\theta}$$

which implies

$$D_2^2 + D_3^2 = \frac{\partial^2}{\partial r^2} + \frac{1}{r^2}\frac{\partial^2}{\partial\theta^2} + \frac{1}{r}\frac{\partial}{\partial r}.$$

Thus by (D.2)

$$\begin{aligned}\Delta = {} & \Xi^2\frac{\partial^2}{\partial s^2} + \frac{\partial^2}{\partial r^2} + \left(\frac{1}{r^2} + \tau^2\Xi^2\right)\frac{\partial^2}{\partial\theta^2} - 2\tau\Xi^2\frac{\partial^2}{\partial s\partial\theta} \\ & - r\Xi^3(\kappa\tau\sin\theta + \kappa'\cos\theta)\frac{\partial}{\partial s} + \left(\frac{1}{r} - \kappa\Xi\cos\theta\right)\frac{\partial}{\partial r} \\ & + \left(r\tau\Xi^3(\kappa\tau\sin\theta + \kappa'\cos\theta) - \tau'\Xi^2 + \frac{\kappa\Xi\sin\theta}{r}\right)\frac{\partial}{\partial\theta}.\end{aligned} \tag{D.3}$$

We remark that if γ is a plane curve, then $\tau = 0$. If, in addition, $\kappa = 0$ (contrary to our standing assumption) we get $\Xi = 1$, and then (D.3) becomes the laplacian in cylinder coordinates

$$\Delta = \frac{\partial^2}{\partial s^2} + \frac{\partial^2}{\partial r^2} + \frac{1}{r}\frac{\partial}{\partial r} + \frac{1}{r^2}\frac{\partial^2}{\partial\theta^2} = \frac{\partial^2}{\partial s^2} + \frac{1}{r}\frac{\partial}{\partial r}\left(r\frac{\partial}{\partial r}\right) + \frac{1}{r^2}\frac{\partial^2}{\partial\theta^2}.$$

We conclude that formula (D.3) is valid even if $\kappa = 0$, even though not all of the Frenét formulas make sense.